

MAN1216Q23-17dB

Quadrifilar Helix Antenna For GNSS

MECSINE 兆赫

Quadrifilar Helix Antenna

For L1/L5 G1 B1/B2a E1/E5a

MAN1216Q23-17dB

56 x Φ 23 mm

All Use For RF & Microwave

Shenzhen Megsine technology co., ltd www.megsine.com sales@megsine.com

MAN1216Q23-17dB

Quadrifilar Helix Antenna For GNSS

MECSINE 兆赫讯

FEATURES

- 1, High gain and low Noise Figure.
- 2, Light weight less then 20g.
- 3, Convenient connect both DC bias and RF Signal through SMA.
- 4, IP67 compliance.



DESCRIPTION

The MAN1216Q23-17dB is a Quadrifilar Helix antenna in structure, which has better gain and wide-angle circular polarization characteristics compared to traditional antennas. It can receive more low elevation satellite signals. Especially suitable for devices such as UAV, handheld devices, wearable devices, etc. It convenient connected both DC bias and RF Signal through one SMA. All Antennas are 100% RF tested.

MAXIMUM RATINGS

Characteristic	Ratings	Units
Weight	12	g
Operating Temperature Range	-40~+85	°C
Storage Temperature Range	-40~+85	°C
Moisture Sensitivity Levels	3	MSL
Classification of Waterproof	IP67	

ANTENNA CHARACTERISTICS

Item	Frequency Range	Min.	Typ.	Max.
Gain(dBi)	GPS L1		1.5	
	GPS L5		1	
	GLONASS G1		-0.5	
	BDS B1		0.5	
	BDS B2a		1	
	GALILEO E1		1.5	
	GALILEO E5a		1	
Characteristics Impedance (Ω)		50 (Nominal)		
Polarization		RHCP		
Covering Range (°)		360		
Out Put VSWR (:1)		2		
Axial Ratio (dB)		3		

- Ta: +25±5°C

All Use For RF & Microwave

Shenzhen Megsine technology co., ltd www.megsine.com sales@megsine.com

MAN1216Q23-17dB

Quadrifilar Helix Antenna For GNSS


MECSINE 兆赫訊

AMPLIFIER CHARACTERISTICS

Item	Frequency Range (MHz)	Min.	Typ.	Max.
Gain (dB)		-	17	
Noise Figure (dB)				2
Output VSWR (:1)				2
Voltage (V)		3.3		16
Current (mA)			9	

- Ta: +25±5°C

SHAPES AND DIMENSIONS

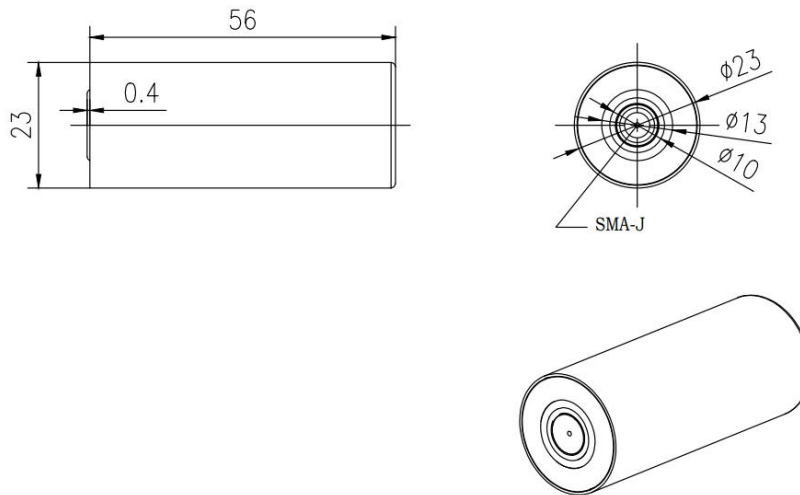

Revision	Description	Date
Rev0	Preliminary	2026/7/20

All Use For RF & Microwave

Shenzhen Megsine technology co., ltd www.megsine.com sales@megsine.com