

MAN1176C103

GNSS Chip Antenna

MECSINE 兆赫

GNSS Chip Antenna

For L5/B2a/E5a

MAN1176C103

10.2x3.1x4 mm

All Use For RF & Microwave

Shenzhen Megsine technology co., ltd www.megsine.com sales@megsine.com

MAN1176C103

GNSS Chip Antenna

MEGSINE 兆讯

Applications

1. Satellite communication
2. Navigation and position
3. For L5,B2a, E5a

Features

1. Compact size
2. Omni-directional radiation
3. Tape & reel automatic mounting
4. RoHS compliance (Pb-Free)

Description

The MAN1176C103 is designed for GNSS Antenna. We provide comprehensive antenna design support such as simulation, testing and manufacturing for custom antenna solutions to meet your specific application needs.

Electrical Specification

Table 1. MAN1176C103 Electrical Specification

Item	Min.	Type	Max.	Unit
Frequency Range	1164		1189	MHz
VSWR	1.1		3	
Efficiency	30		46	%
Peak Gain		0.2		dBi
Polarization		Linear		
Nominal Impedance		50		Ω

• Ta: +25±5°C

Mechanical Specifications

Table 2. MAN1176C103 Mechanical Specification

Item	Min.	Type	Max.	Unit
Antenna Size		10.2*3.1* 4		Mm
Storage Temperature	-40		+85	°C
Operating temperature	-40		+85	°C

Outline Drawing

Figure 1. MAN1176C103 View (Unit: mm)



All Use For RF & Microwave

Shenzhen Megsine technology co., ltd www.megsine.com sales@megsine.com




MAN1176C103

GNSS Chip Antenna

MEGSINE 兆赫讯


Recommend PCB Layout

Figure 2. MAN1176C103 PCB Layout (Unit: mm) TOP VIEW

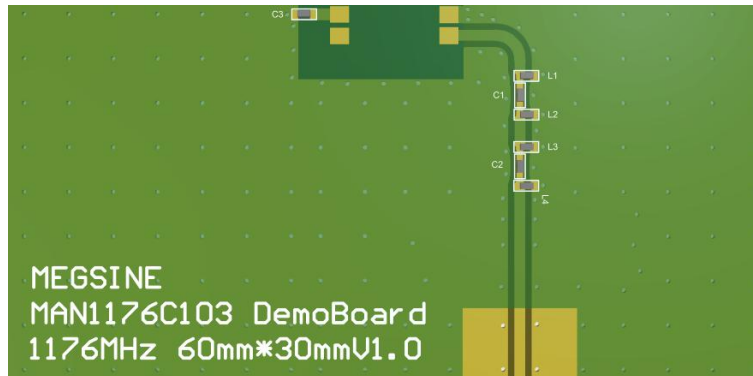


Size 60*30mm

Figure 3. MAN1176C103 PCB Layout (Unit: mm) BOTTOM VIEW

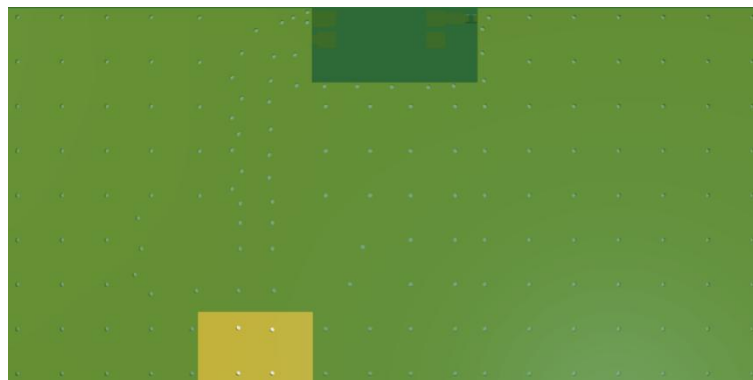

Size 60*30mm

Figure 4. MAN1176C103 PCB Antenna Layout (Unit: mm)

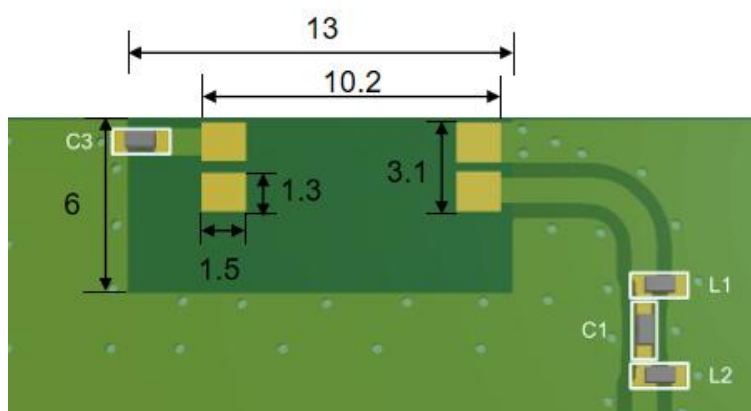

All Use For RF & Microwave

Shenzhen Megasine technology co., ltd www.megsine.com sales@megsine.com

MAN1176C103

GNSS Chip Antenna

MECSINE 兆讯

Figure 5. MAN1176C103 Matching Circuit (Unit: mm)


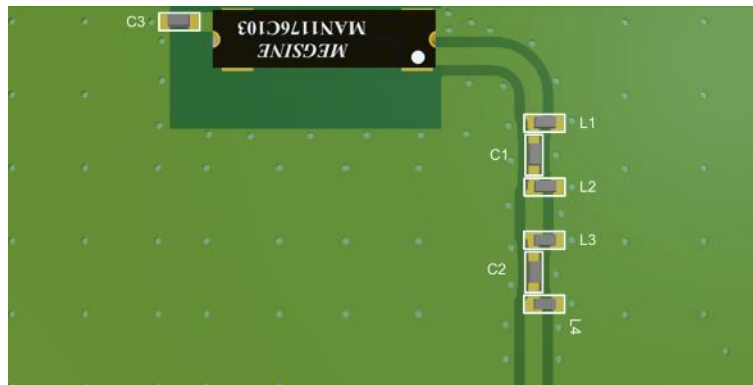


Table 3. MAN1176C103 Matching

Location	Description	Vendor
C1	5pf	MURATA
C2	0Ω	MURATA
C3	6.2pf	MURATA
L1	6pf	MURATA
L2	N/C	N/C
L3	N/C	N/C
L4	N/C	N/C

Typical Performance

Figure 6. MAN1176C103 VSWR

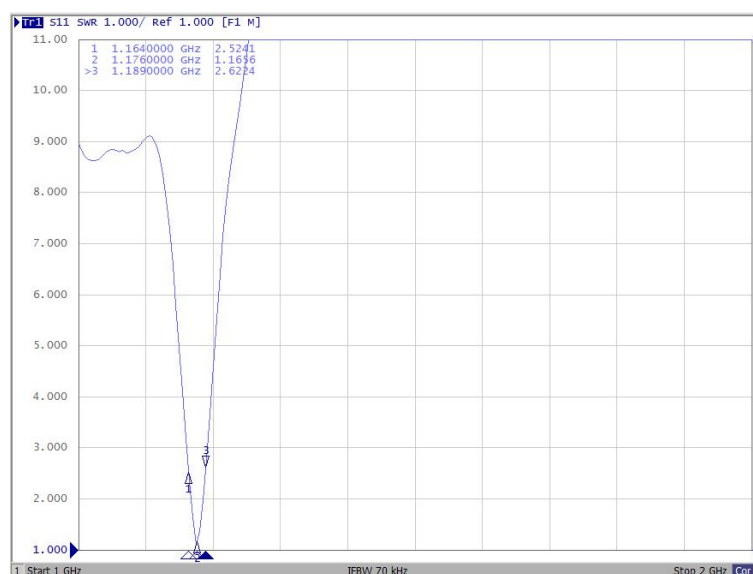

All Use For RF & Microwave


Shenzhen Megsine technology co., ltd www.megsine.com sales@megsine.com

MAN1176C103

GNSS Chip Antenna


MECSINE 兆讯

Figure 7. MAN1176C103 Return Loss

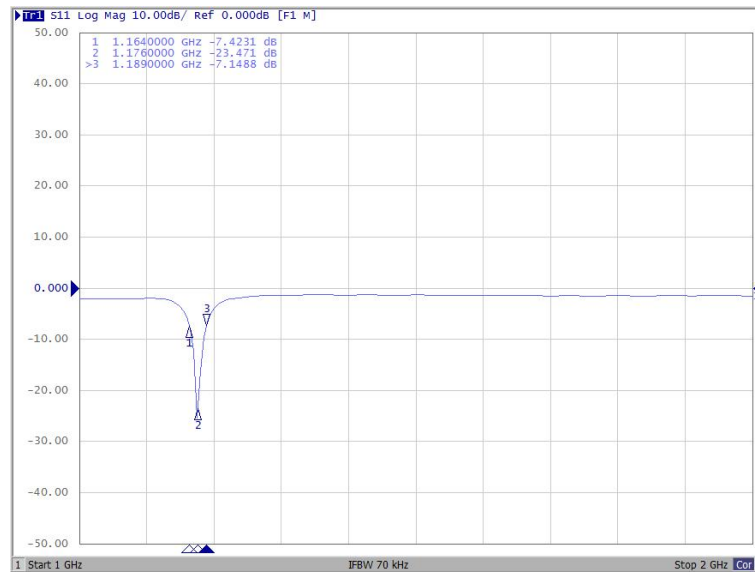

Radiation Pattern & Efficiency & Peak Gain

Figure 8. The Gain pattern is measured in FAR-field chamber

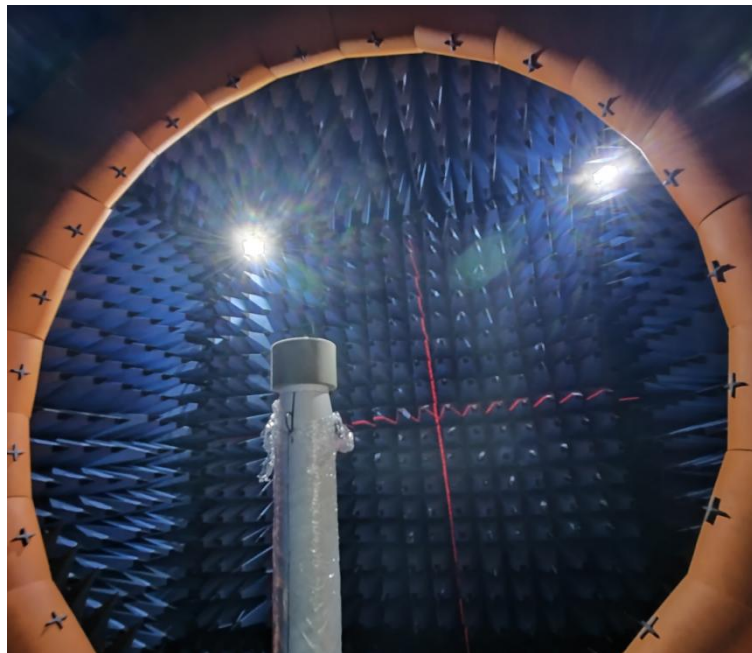

All Use For RF & Microwave

Shenzhen Megsine technology co., ltd www.megsine.com sales@megsine.com

MAN1176C103

GNSS Chip Antenna

MECSINE 兆讯

Table 4. MAN1176C103 Total Efficiency&Peak Gain

Item (MHz)	Efficiency (%)	Peak Gain (dBi)	Avg gain (dB)
1150	16	-4.75	-8.06
1165	31	-1.59	-5.09
1170	40	-0.48	-3.92
1176	46	0.01	-3.39
1180	46	0.22	-3.32
1190	34	-1.49	-4.67
1200	21	-4.03	-6.80

Figure 9. MAN1176C103 Total Efficiency


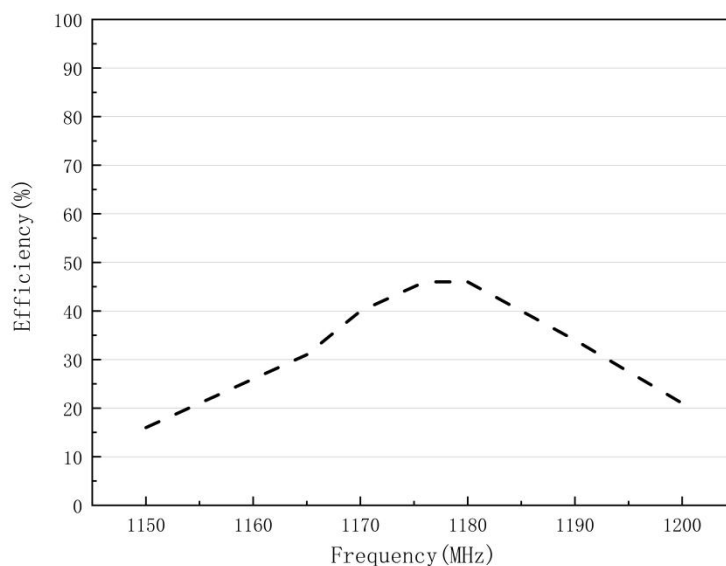


Figure 10. MAN1176C103 Peak Gain

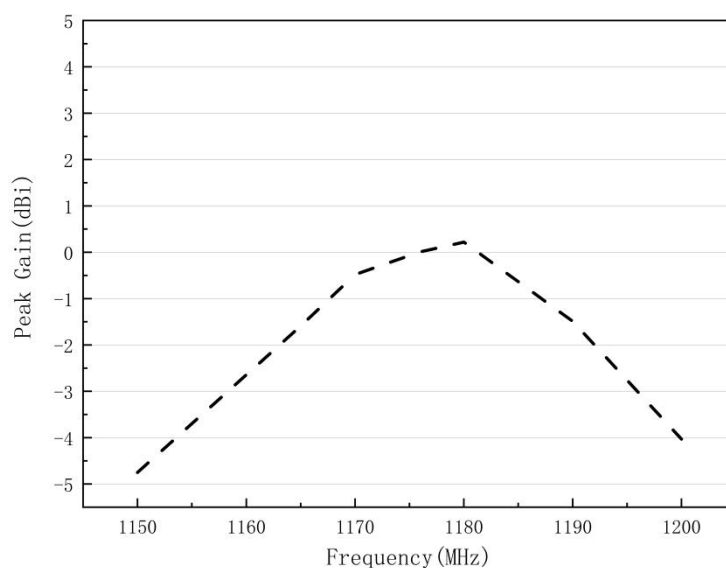


All Use For RF & Microwave

MAN1176C103

GNSS Chip Antenna

MECSINE 兆讯

Figure 11. Radiation Pattern

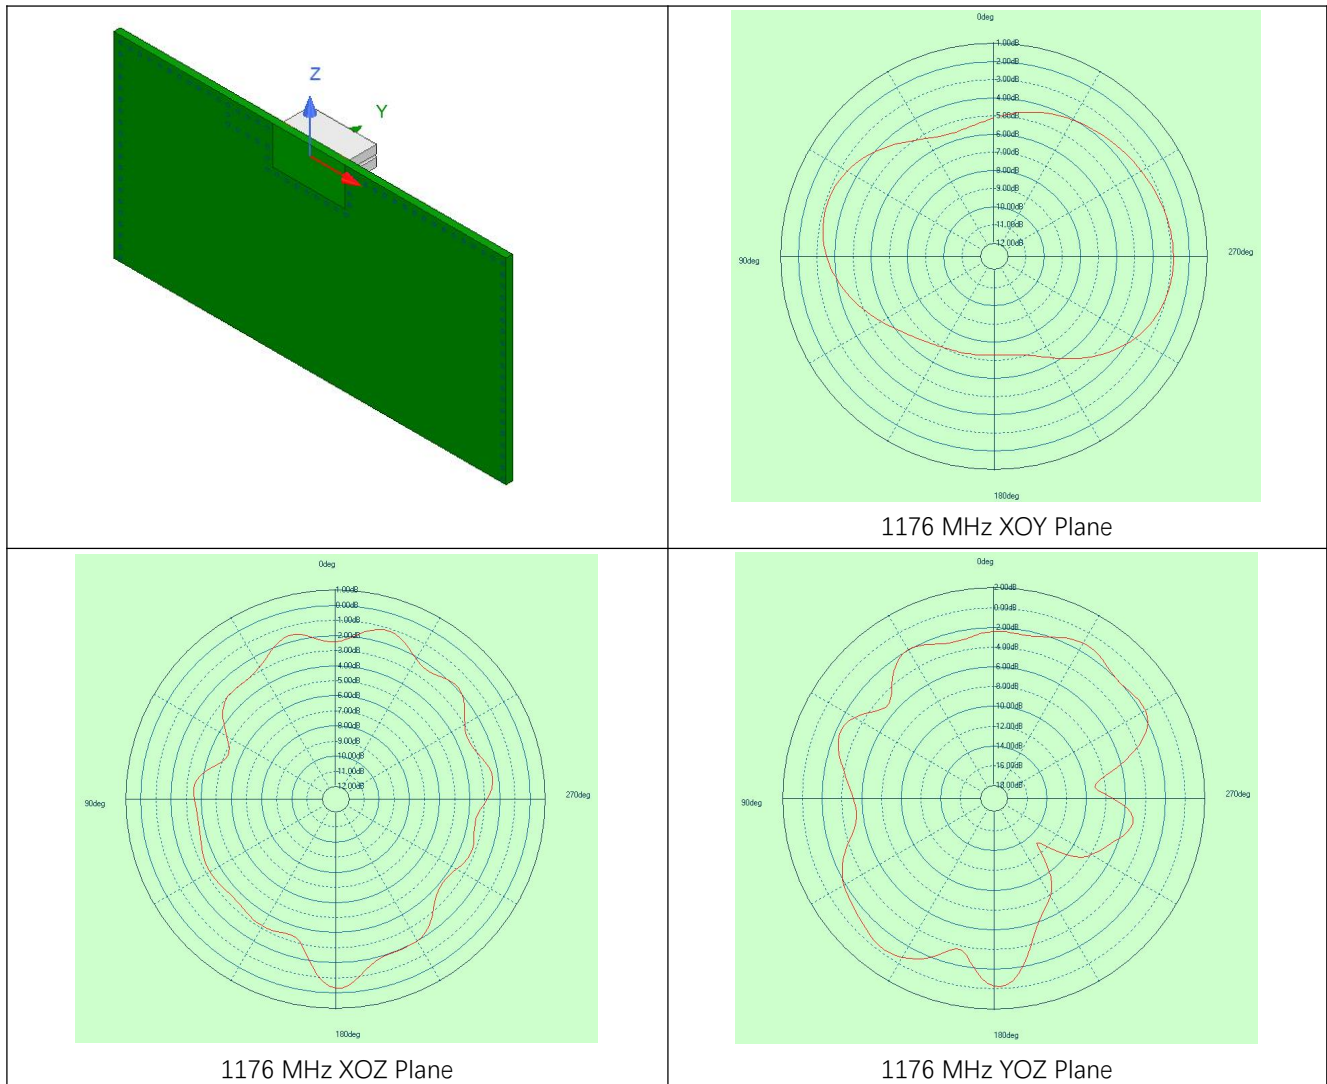

All Use For RF & Microwave

Shenzhen Megsine technology co., ltd www.megsine.com sales@megsine.com



MAN1176C103

GNSS Chip Antenna

MECSINE 兆讯

Packaging and Ordering Information

Figure 12. Packaging Information

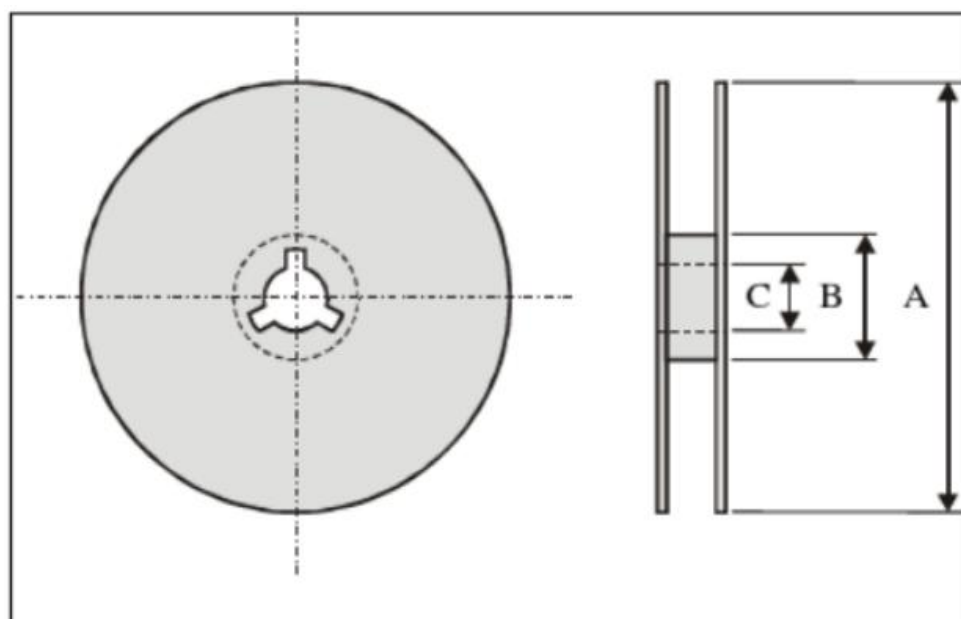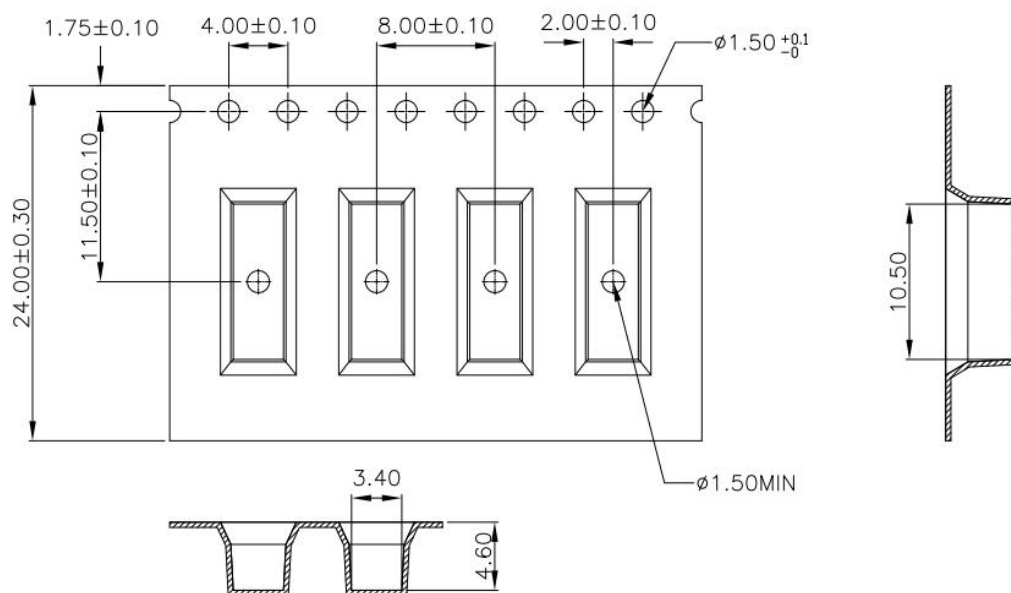

Index	A	B	C
Dimension(mm)	330	100	13.5

Table 5. Packaging and Shipping

Device	Packaging	Reel	Shipping
MAN1176C103	SMD	13"	1500/Reel

All Use For RF & Microwave

Shenzhen Megsine technology co., ltd www.megsine.com sales@megsine.com

MAN1176C103

GNSS Chip Antenna



Revision	Description	Date
Rev0	Preliminary	2024/12/25

All Use For RF & Microwave

Shenzhen Magsine technology co., ltd www.magsine.com sales@magsine.com